

STI WIRELESS CHIMES



STI-3350



STI-3610



STI-3300



STI-3360

PRODUCT OVERVIEW

STI Wireless Chimes greet your visitors with a pleasant chime and lets you know when the door opens or a person enters the detection zone. All chimes are compatible with each other. Distinguish between front and back doors by adding transmitters and selecting a different chime on each. Transmitters have up to 500' operating range.

HOW IT WORKS

Wireless Doorbell Chime (STI-3350)

Mount the wireless button next to your door, plug the receiver into any 120 VAC indoor electrical outlet and the chime is ready to operate. Doorbell button is water-resistant.

Wireless Entry Alert® Chime (STI-3360)

Mount the small transmitter and magnet to any door and plug the receiver into any 120VAC indoor electrical outlet. That's it. No wiring required. When a monitored door opens, the Entry Alert Chime sends a signal to the receiver announcing the entrance with one of ten selectable chimes.

Wireless Motion-Activated Chime (STI-3610)

Mount the motion transmitter and plug chime receiver into any 120VAC indoor electrical outlet within operating range. Alerts when someone enters the transmitter's detection zone. The weather sealed transmitter has 140° x 40 ft. detection zone. Includes adjustable mounting bracket.

Wireless Doorbell Extender (STI-3300)

This doorbell chime connects to your existing traditional hard wired doorbell system and extends a new chime to hard-to-hear areas. Once the unit is wired into existing system, the included receiver can be plugged into any standard 120VAC indoor electrical outlet. This allows you to hear when someone is at your door when in remote areas. Normally open switch, 16 VAC.

KEY FEATURES

General Information

- All chimes are compatible with each other.
- Add up to 10 transmitters per receiver.
- Up to 500' operating range.
- Ideal for the home, store or office.
- One year limited warranty.

Construction

- UL/cUL Listed, FCC and IC Certified.

Installation

- Quick and easy to install – no wiring needed.
- Receiver plugs into 120 VAC outlet.

Electronics

- Receiver has a low and high volume adjustment.
- Supervised low battery alert.

Options

- 10 sound options with the push of a button on the transmitter (excludes STI-3331).
- STI-3300 can distinguish between a front and back door by adding another sensor. The first doorbell will play "ding-dong" and the second will play "dong."

STI Wireless Chimes

Dimensions and Technical Information

MODELS AVAILABLE

- STI-3350** Wireless Doorbell Chime with Receiver
- STI-3360** Wireless Entry Alert® Chime with Receiver
- STI-3610** Wireless Motion-Activated Chime with Receiver
- STI-3300** Wireless Doorbell Extender with Receiver

Accessories

- STI-3301** Wireless Doorbell Chime Transmitter
- STI-3551** Wireless Entry Alert® Transmitter
- STI-3601** Wireless Motion-Activated Transmitter
- STI-3331** Wireless Doorbell Extender Transmitter
- STI-3353** Wireless Chime Receiver

Selectable Sounds (*excludes 3300/3331*)

- Ding
- Dong
- Ding-Dong
- Westminster – 4 note
- Westminster – 8 note
- Knock Knock
- Jingle Bells
- Barking Dogs
- Bicycle Bell
- Buzzer

APPROVALS & WARRANTY

TESTING

- It has been tested and approved or listed by:
 - UL/cUL Listed No. S7255
 - FCC and IC Compliant

WARRANTY


One year limited warranty within normal use.

SPECIFICATIONS

- Frequency:** 433 MHz
- Power Source:** Receiver plugs into 120 VAC outlet (minimum 110 VAC)

Sensors include:

- STI-3301** One CR2032 battery
- STI-3551** One AAA battery
- STI-3601** One Lithium CR123 battery
- STI-3331** n/a

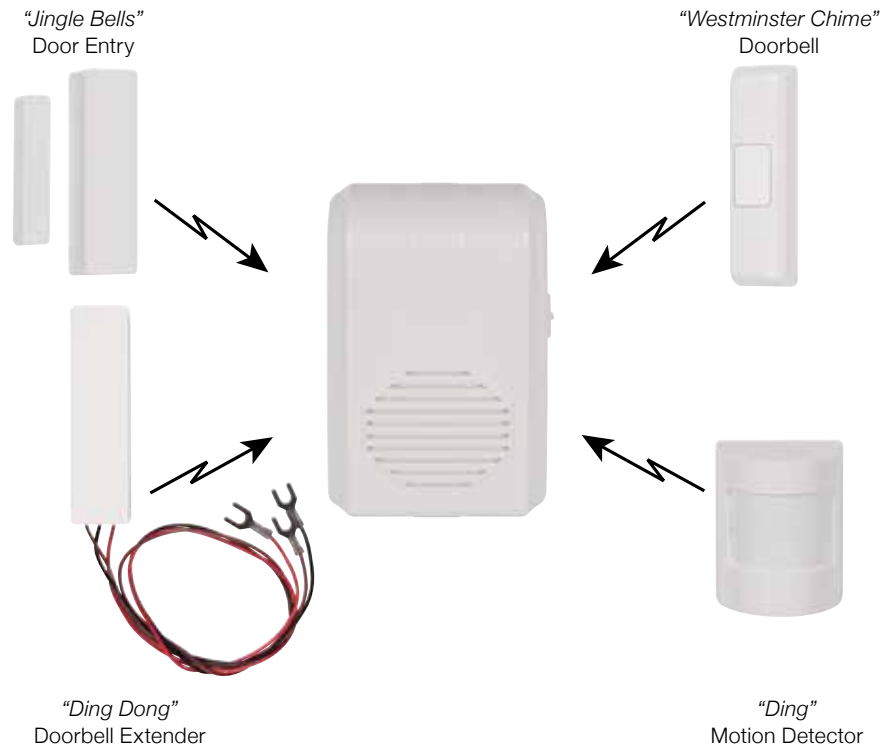

**All accessories work together!
Make each a different sound and know the exact transmitting source.**



**Safety Technology
International**

2306 Airport Road
Waterford, Michigan
48327, USA

Tel: 248-673-9898
Fax: 248-673-1246
info@sti-usa.com
www.sti-usa.com

Taylor House
34 Sherwood Road
Bromsgrove, Worcester-
shire
B60 3DR, England