


STI LATCHING/TIMER MODEL LT-1

NOTE:

It is important to read, understand and follow all instructions provided with this product. It is the installer's responsibility to comply with NFPA 70, 72 & 101, NEC, mounting specifications according to ADA and other applicable codes. This product is not to be used in place of panic hardware. To avoid electrical shock, DO NOT attempt to install this product when power is on. After installation and testing are complete, provide a copy of this manual to all personnel responsible for testing and maintenance of this product.

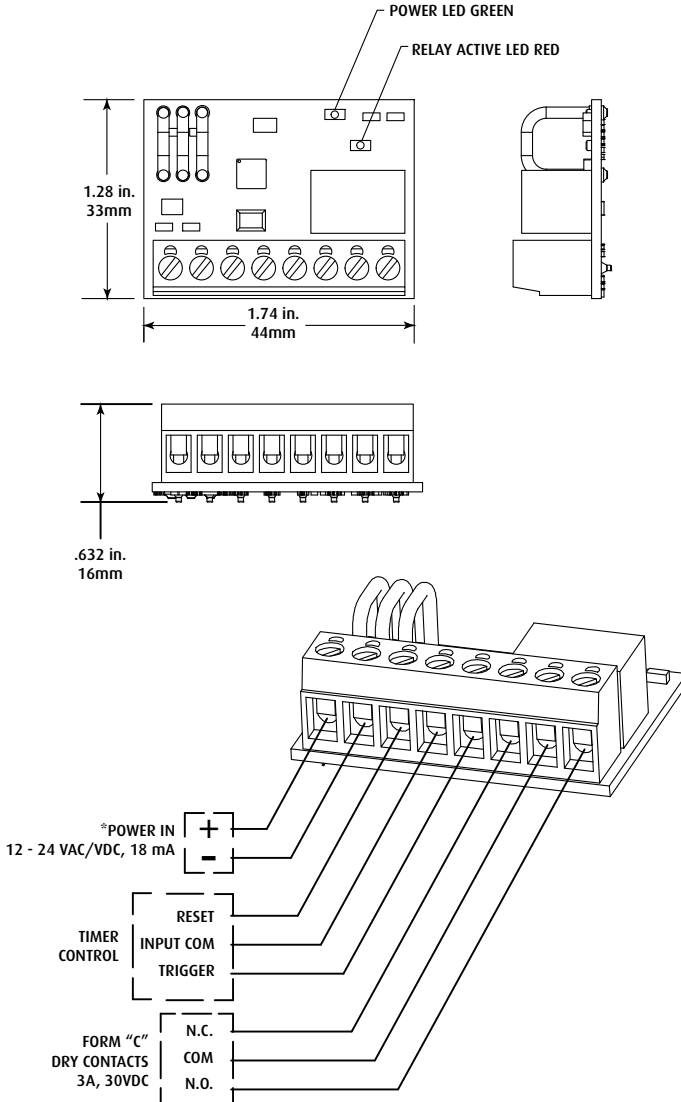

RELAY MODE

N.O. - Relay switches with power to circuit - Fail Safe

N.C. - Relay is in same state as with no power to circuit - Fail Secure

TO CHANGE TIMER SETTINGS

Cut jumpers with "X", do not cut jumpers with "□".



Default timer setting is 15 seconds.

If the trigger is activated during a timing cycle, the timer is restarted.

NOTE: To ensure jumpers do not reattach or short to other components, cut jumper off completely flush to PCB.

Three year warranty or a one year limited warranty (from date of purchase) on most products. See website for details.

Electronic warranty form at www.sti-usa.com/wc14.

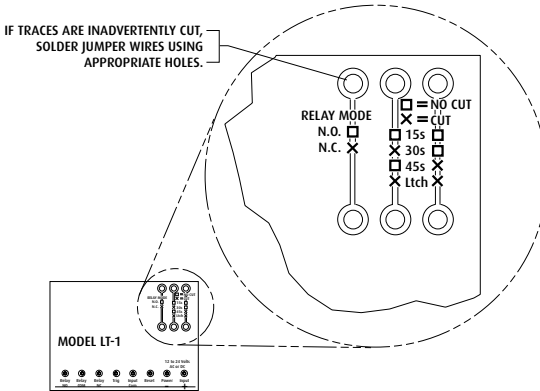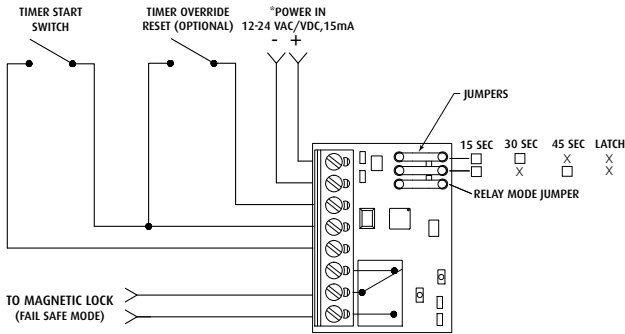

Safety Technology International, Inc.

2306 Airport Road • Waterford, MI 48327, USA
 Phone: 248-673-9898 • Fax: 248-673-1246
 info@sti-usa.com • www.sti-usa.com

Safety Technology International Ltd

Taylor House • 34 Sherwood Road • Bromsgrove
 Worcestershire • B60 3DR, England • Tel: +44 (0)1527 520 999
 Fax: +44 (0)1527 501 999 • info@sti-europe.com • www.sti-europe.com